




NATIONALTURBINE CORPORATION
 374 Northern Lights Drive
 Syracuse, NY 13212
 888-293-7434 fax 315-455-5545
 www.nationalturbine.com
 sales@nationalturbine.com

ACCESSORIES

RUBBER SLEEVES, REINFORCED TUBE AND PIPE STYLE

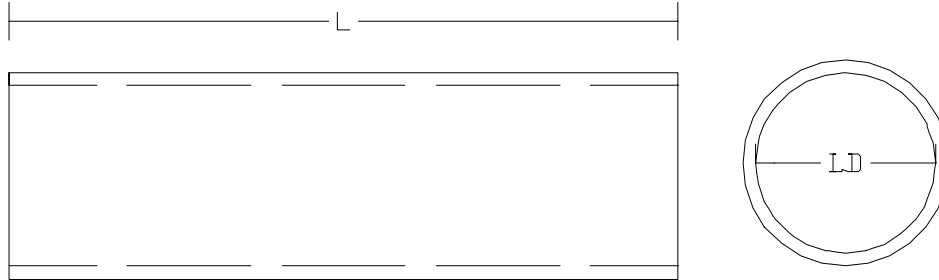

Part Number	I.D.	"L"	Style	Weight
ST3-7	3.0 (76.2)	7.0 (177.8)	Tube	2.0 (1.0)
ST5-7	5.0 (127.0)	7.0 (177.8)	Tube	3.0 (1.5)
ST6-7	6.0 (152.4)	7.0 (177.8)	Tube	3.5 (1.5)
ST8-7	8.0 (203.2)	7.0 (177.8)	Tube	5.0 (2.5)
ST12-7	12.0 (305.0)	7.0 (177.8)	Tube	7.0 (3.0)
SP3-6	3.5 (88.9)	6.0 (152.4)	Pipe	2.5 (1.0)
SP5-6	5.56 (141.2)	6.0 (152.4)	Pipe	3.5 (2.0)
SP6-6	6.63 (168.4)	6.0 (152.4)	Pipe	4.0 (2.0)
SP8-6	8.63 (219.1)	6.0 (152.4)	Pipe	5.0 (2.5)
SP12-6	12.75 (323.9)	6.0 (152.4)	Pipe	7.0 (3.0)
SP3-12	3.5 (88.9)	12.0 (305.0)	Pipe	3.5 (2.0)
SP5-12	5.56 (141.2)	12.0 (305.0)	Pipe	6.5 (3.0)
SP6-12	6.63 (168.4)	12.0 (305.0)	Pipe	7.5 (3.5)
SP8-12	8.63 (219.1)	12.0 (305.0)	Pipe	9.5 (4.5)
SP12-12	12.75 (323.9)	12.0 (305.0)	Pipe	14.0 (6.5)

Materials of Construction:

Sleeve: 1/16" EPDM tube and cover,
 fabric and wire reinforced
 Clamps: Stainless steel, 1/2" wide by Variable length

Rating:

Pressure: 15.0 PSIG
 Vacuum: 15.0" HG
 Temp: 250° F.

Dimensions are in inches and (mm).
 Weights are in pounds and (kg).