




**NATIONALTURBINE CORPORATION**  
 374 Northern Lights Drive  
 Syracuse, NY 13212  
 888-293-7434 fax 315-455-5545  
 www.nationalturbine.com  
 sales@nationalturbine.com

# VACUUM EQUIPMENT TECHNICAL DATA AND DIMENSIONS

## SERIES 30 PLATFORM VACUUM UNITS

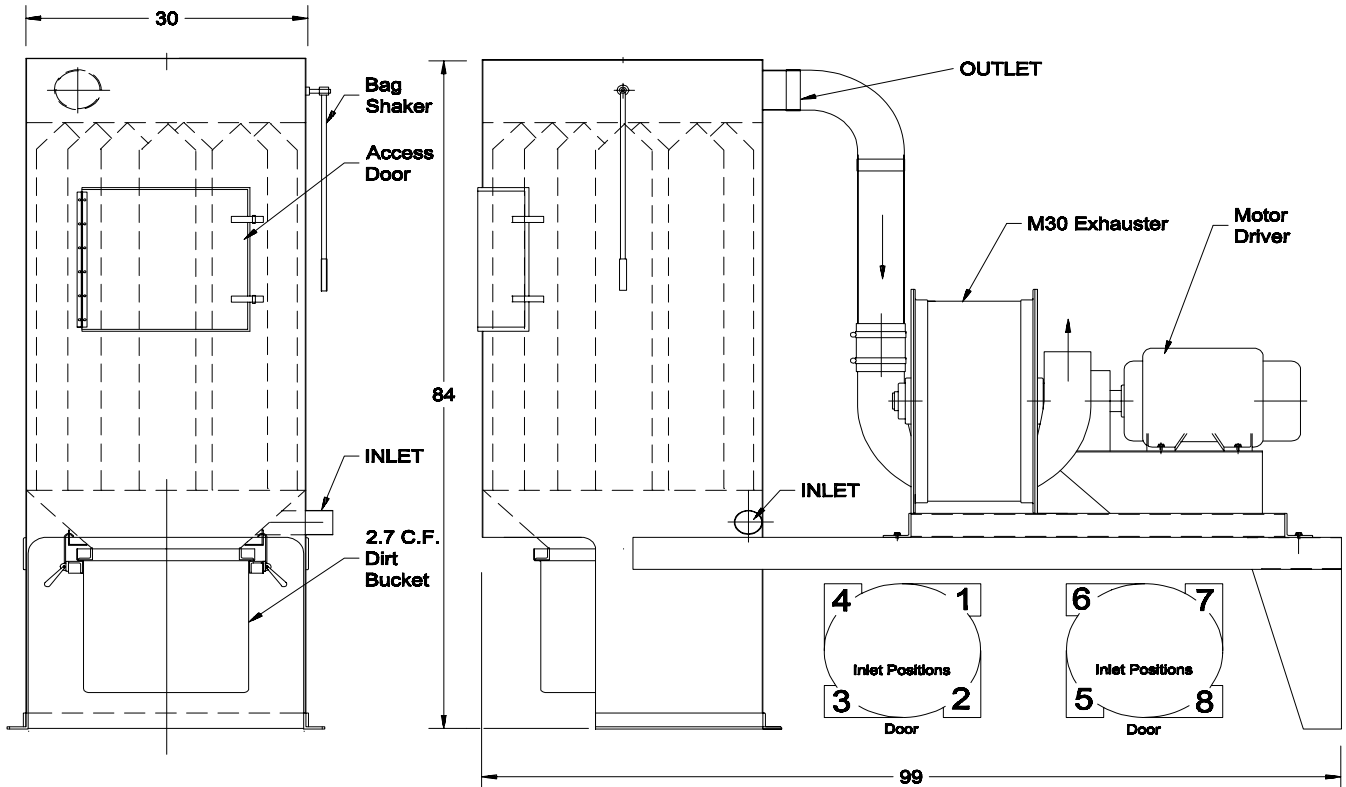

VOLUME ICFM	4" HG VACUUM	5" HG VACUUM	6" HG VACUUM	7" HG VACUUM	8" HG VACUUM
100	7.5 HP	7.5 HP	10 HP	15 HP	15 HP
200	7.5 HP	7.5 HP	15 HP	15 HP	15 HP
300	7.5 HP	10 HP	15 HP	15 HP	20 HP
400	10 HP	15 HP	15 HP	15 HP	20 HP
500	15 HP	15 HP	15 HP	20 HP	20 HP
600	15 HP	15 HP	20 HP	20 HP	25 HP
700	15 HP	15 HP	20 HP	25 HP	25 HP
800	15 HP	15 HP	20 HP	25 HP	30 HP
900	15 HP	20 HP	20 HP	25 HP	30 HP
1000	15 HP	20 HP	25 HP	25 HP	30 HP

**Notes:**  
 For Higher Vacuum  
 Units, Consult Factory

Overall Length (99")  
 May be Less (92")  
 Depending on HP  
 Requirement

See Further Specifications  
 on Page 2



**NATIONALTURBINE CORPORATION**  
374 Northern Lights Drive  
Syracuse, NY 13212  
888-293-7434 fax 315-455-5545  
www.nationalturbine.com  
sales@nationalturbine.com

## VACUUM EQUIPMENT TECHNICAL DATA AND DIMENSIONS

### SPECIFICATIONS FOR: **SERIES 30 PLATFORM VACUUM UNITS**

FILTER AREA:	74 SQUARE FEET
FILTER MATERIAL:	SINGED POLYESTER - OTHER MATERIALS AVAILABLE
FILTER DESIGN:	INVERTED BAG - SNAP BOTTOM
SHAKER MECHANISM:	MANUAL TRANSVERSE - STANDARD AUTOMATIC SHAKER - OPTIONAL
DUST BUCKET:	2.7 CUBIC FOOT "FEATHER-LITE" CORROSION-PROOF, MOLDED HIGH DENSITY POLYURETHANE, TRANSLUCENT TO VIEW DIRT LEVEL. STEEL 4.0 CUBIC FOOT BUCKET - OPTIONAL
TANK CONSTRUCTION:	12 GAUGE ROLLED STEEL STAINLESS STEEL CONSTRUCTION - OPTIONAL
FRAME CONSTRUCTION:	12 GAUGE, REINFORCED PLATE STEEL
FINISH:	EPOXY ENAMEL
TANK INLET:	SIZE & POSITION - PER CUSTOMER REQUIREMENTS
TANK OUTLET:	TOP SIDE 5-INCH TUBE - STANDARD
EXHAUSTER:	M30 SERIES INDUSTRIAL, 4 BEARING EXHAUSTER, CONSTANT VACUUM, SELF REGULATING FLOW, HIGH PERFORMANCE CAST ALUMINUM IMPELLERS